

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制或传播, 侵权必究。 未经许可, 擅自复制或传播, 侵权必究。

FOR-1755 Rev.1.3

2

3

4


5

6





未注公差/General tolerances(mm)



0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

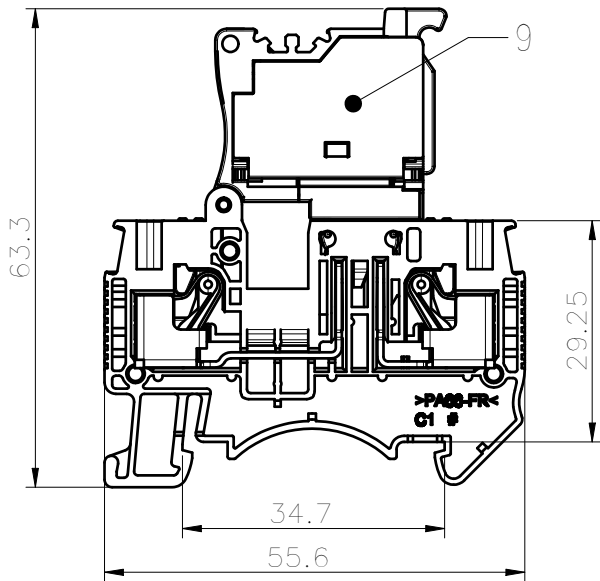

A

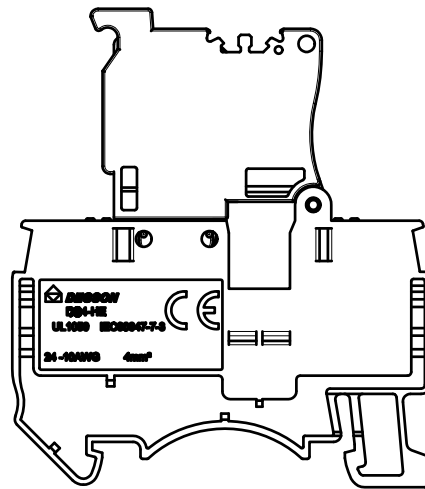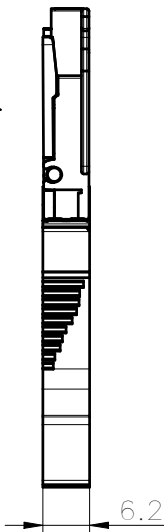

A Direction
(W/O Cove)

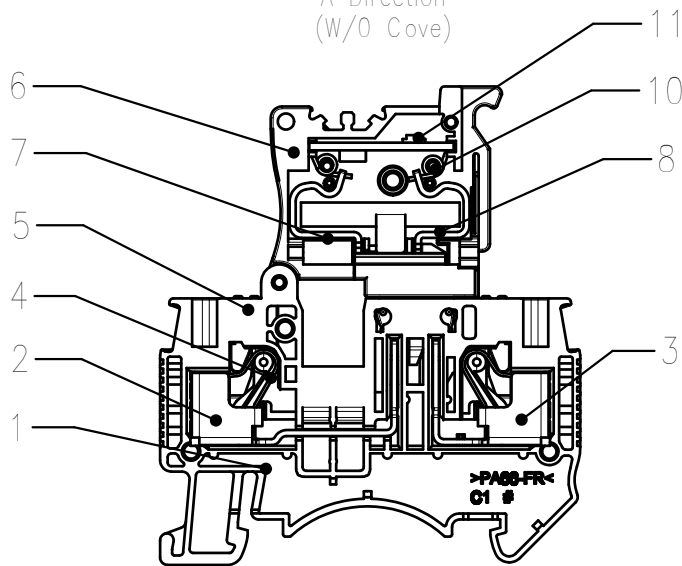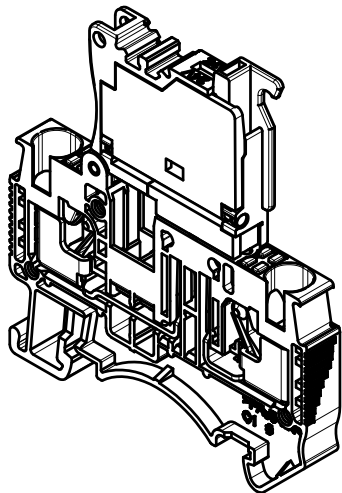

11	DS4-HE 24V PCB	/	/
10	Torsional spring	bronze	/
9	Cover	PA66	UL94V-0
8	Current carrier 4	Copper alloy	Sn plated
7	Current carrier 3	Copper alloy	Sn plated
6	Fuse Housing	PA66	UL94V-0
5	Button	PA66+GF%	UL94V-0
4	Spring	Stainless steel	/
3	Current carrier 2	Copper alloy	Sn plated
2	Current carrier 1	Copper alloy	Sn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	24/6.3	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	24~10 / 0.2~4.6(Sol)		
间距/Pitch(mm)/线数范围/Poles	6.2/01P		
剥线长度/Stripping length(mm)	11~13		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		



MATERIAL:	/	SURFACE:	/
MAT NO./REV:	/	MAT STATUS:	/

APPD:	Li GL	2022.04.25
CHKD:	Ma EK	2022.04.25
DRFT:	Wang LX	2022.04.15

NAME	DS4-HE-LD24-01P-1Y-00A (H)		
DRAWING NO.	/	TYPE	COMPONENT DRAWING
DRAWING STATUS	/	SCALE	1:1
SHEET	1/1		

00	/	/	Wang LX	2022.04.15
REV	ECN	DESCRIPTION	DRFT	DATE



1

2

3

4

5

6